
SERVO-ARC 600

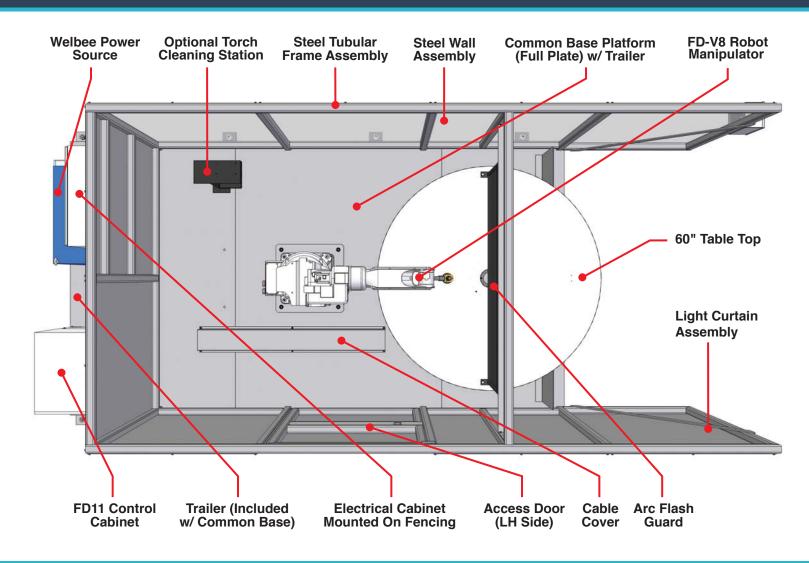


Standard Option:

SERVO-ARC 600 – 60" servo-driven indexing table

Details:

- 1.2kW Servo-motor, RV-40E Gearbox
- Omron 1495mm Light Curtains
- Omron Switch/Two Actuators for station designation
- 3" through hole diameter in table top
- Index Speed (180°) 4.2 seconds
- Work Capacity 250kg/side

- Weight Approx. 3000kg
- Standard fork lift pockets

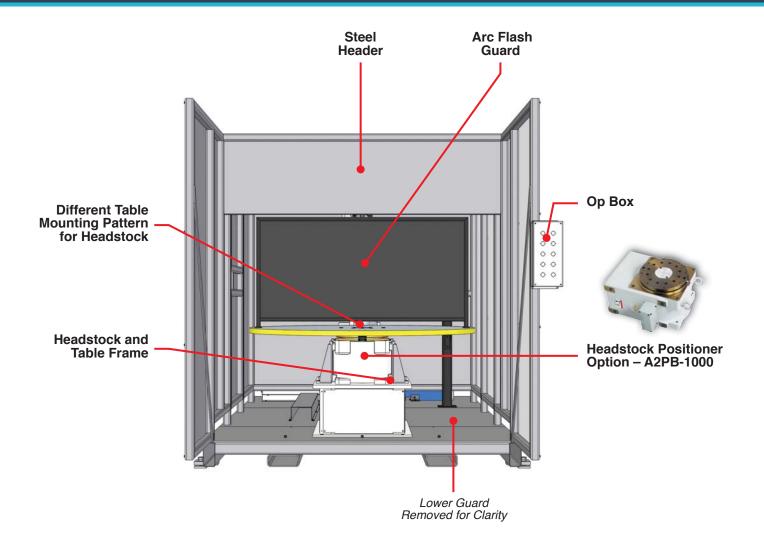

Specifications:

Footprint Dimensions:

Width: 2200mm (86.6") Height: 2235mm (88.0") Depth: 4584mm (180.5")

Manipulator Types:

• FD-V8

• FD-B6

Available I/O Slots:

23 Inputs/24 Outputs

(Additional Power Supply needed for Outputs)

Additional Options:

- A2PB-1000 Headstock instead of servo-table
- Fixture mounting pattern in table top
- Torch cleaning station
- Station Lighting
- · Access door on RH side
- Safety Fence on Full Base
- 48" Table Top
- Basic Layout (SERVO-ARC 600B)
- Extended I/O

